

+

03/29/00

0095372444 03/29/00

UTILITY PATENT APPLICATION TRANSMITTAL

Only for new nonprovisional applications under 37 CFR 1.53(b)

Attorney Docket No.	862.C1871
First Named Inventor or Application Identifier	
MASAO OKADA	
Express Mail Label No.	

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages

3. ☒ Drawing(s) (35 USC 113) Total Sheets

4. ☒ Oath or Declaration Total Pages

a. ☐ Newly executed (original or copy)

b. ☒ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting
inventor(s) named in the prior application, see
37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

<input checked="" type="checkbox"/> Customer Number or Bar Code Label	<input type="checkbox"/> Correspondence address below	
05514 (Insert Customer No. or Attach bar code label here)		
NAME		
Address		
City	State	Zip Code
Country	Telephone	Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	31-20 =	11	X \$ 18.00 =	\$198.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	20-3 =	17	X \$ 78.00 =	\$1326.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$0
				BASIC FEE (37 CFR 1.16(a))	\$690.00
	Total of above Calculations =				\$2214.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				0
	TOTAL =				\$2214.00

19. Small entity status


- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 2214.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	LEONARD P. DIANA
SIGNATURE	 28, 296
DATE	March 28, 2000

TITLE OF THE INVENTION

ANIMATION DISPLAY APPARATUS, ARCADE GAME MACHINE,
CONTROL METHOD AND APPARATUS THEREOF,
5 AND STORAGE MEDIUM

FIELD OF THE INVENTION

The present invention relates to an animation
display apparatus, arcade game machine, control method
10 and apparatus thereof, and storage medium.

BACKGROUND OF THE INVENTION

An amusement arcade (game center) provides arcade
game machines or apparatuses (hereinafter simply
15 referred to as a game machine), which can print and
output user's original stickers by photographing a
self-portrait of the user with a built-in camera and
framing the portrait with a desired modifiable frame.
Each of these game machines comprises dedicated
20 hardware.

In order to attract a user during non-operating
period of a game machine, game machines of this type
display various animation (moving images) on the
display screen for a demonstration.

25 For instance, in a case of a shooting game, the
game machine may display a sample of the shooting game

for the demonstration. Therefore, special hardware does not need to be added to such game machines.

However, in a case of a game machine which mainly prints stickers, an additional function, which is
5 different from printing stickers, is necessary to display such demonstration. This causes an increase in cost of the game machine. For instance, in order to display animation, images must be stored frame by frame. Thus, in order to store an extremely large
10 amount of data, a large memory capacity is required. Furthermore, generating such animation requires extremely time consuming operation.

Moreover, although a conventional game machine of this type has a simple construction for photographing
15 an image with a built-in camera, synthesizing the photographed image with an appropriate frame, and printing the image, the game machine comprises dedicated hardware. Therefore, manufacturing the game machine requires a high cost.

20 Furthermore, because of the simplicity of the operation, the game machine is unable to print varieties of stickers desired by users. For instance, a user cannot input or select arbitrary character strings, e.g., user's name or the like, to be combined
25 together and printed.

In a case where a user can select or input

various character strings, the operation of the game machine tends to become complicated. Furthermore, in such case, the game machine must be designed so that a user can easily change contents of the inputted setting
5 after or in the middle of input operation.

SUMMARY OF THE INVENTION

The present invention has been proposed to solve the conventional problems, and has as its object to
10 provide an animation display apparatus, arcade game machine, control method and apparatus thereof, and storage medium, which enable relatively easy animation display without requiring a special resource and which enable easy generation of the animation.

15 Furthermore, the present invention provides a method, apparatus and storage medium for quickly starting the animation display.

In order to solve the above-described problems and attain the foregoing objects, an animation display
20 apparatus according to the present invention has the following configuration.

More specifically, the present invention provides an animation display apparatus for combining a plurality of image parts and displaying animation,
25 comprising: image storage means for storing the image parts; processor means for executing display

processing, which is divided into a plurality of
logical layers, in unit of each layer, the display
processing performed for each image part constructing
animation to be displayed; setting means for setting at
5 least one schedule data for each layer, the schedule
data having data which specifies an image part to be
displayed, and attribute data which includes display
update timing; and control means for controlling
processing, set by the setting means and performed by
10 processor means of each layer, in accordance with the
schedule data.

Furthermore, another object of the present
invention is to provide a sticker printing apparatus,
control method thereof, and storage medium, which
15 enable inputting desired character strings,
superimposing these character strings, and printing
varieties of stickers.

Still further, another object of the present
invention is to provide a sticker printing apparatus,
20 control method thereof, and storage medium, which enable
desired setting of plural character strings and designs,
and which enable easy correction of a necessary portion.

Still further, another object of the present
invention is to provide a control method, apparatus and
25 storage medium for quickly starting an application
program.

In order to solve the above-described problems and attain the foregoing objects, a sticker printing apparatus according to the present invention has the following configuration.

5 More specifically, the present invention provides a sticker printing apparatus, including the animation display apparatus according to claim 1, for printing a desired sticker by operating a touch panel overlaid on a display screen, the sticker printing apparatus
10 comprising: input means for inputting a plurality of character strings to be printed on a sticker, in association with a logical layer; storage means for generating bit image data corresponding to an inputted character string and storing the bit image data, each
15 time a character string is inputted by the input means; layout means for superimposingly laying out each of the stored bit image data for each layer; and output means for outputting image data, obtained by the layout means, to printing means.

20 Other objects and advantages besides those discussed above shall be apparent to those skilled in the art from the description of a preferred embodiment of the invention which follows. In the description, reference is made to accompanying drawings, which form
25 a part thereof, and which illustrate an example of the invention. Such example, however, is not exhaustive of

the various embodiments of the invention, and therefore reference is made to the claims which follows the description for determining the scope of the invention.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

10

Fig. 1 shows an external appearance of an arcade game machine according to an embodiment of the present invention;

Fig. 2 is a block diagram showing a control structure of the game machine shown in Fig. 1;

15

Fig. 3 is a block diagram showing a construction of a motherboard shown in Fig. 2;

Fig. 4 is a flowchart showing start-up processing of the game machine shown in Fig. 1;

Fig. 5 is an explanatory view of data recorded in a start-up CD-ROM;

20

Figs. 6A and 6B show an example of animation image displayed by the embodiment of the present invention;

Fig. 7 is a timing chart of display update processing of animation display;

25

Fig. 8 shows a construction of schedule data for animation processing according to the embodiment of the present invention;

Fig. 9 is a flowchart showing animation
5 processing steps;

Fig. 10 is a diagram showing operation sequence of the game machine according to the embodiment of the present invention;

Fig. 11 shows a sheet of stickers printed by the
10 game machine according to the embodiment of the present invention;

Fig. 12 shows a construction of *senjafuda* (to be described later) sticker;

Fig. 13 is a flowchart showing sticker printing
15 processing steps; and

Fig. 14 is a flowchart showing detailed processing of step S104 in Fig. 13.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 Preferred embodiments of the present invention will now be described in detail in accordance with the accompanying drawings.

<Description of Apparatus Construction>

Fig. 1 is a perspective view showing an external
25 appearance of an arcade game machine according to an embodiment of the present invention.

When a predetermined number of coins is inserted to the game machine, a guide is given by screen display or voice. According to the guide, a user selects and inputs a number of characters. The characters and
5 illustrations are combined, and an original sticker in the form of *senjafuda* is generated and printed. *Senjafuda* is a Japanese amulet card presented to a shrine to be pasted on the ceiling or pillar of the shrine.

10 The game machine comprises: a coin shooter for sorting inserted coins, which includes a coin slot 1 and return-coin outlet 2; monitor 3 for displaying a demonstration screen and guide screen; touch panel 4, layered over the monitor 3, to serve as a user input
15 interface; speaker 5 for outputting sound effects or voice; presentation board 6 for explaining the game machine and operation; and outlet 7 for outputting a sticker. The game machine internally comprises a power source, motherboard incorporating a CPU for controlling
20 the entire machine, printer for printing a sticker, lighting for the presentation board or the like, and CD-ROM drive serving as an external storage device.

Fig. 2 is a block diagram showing a control structure of the game machine shown in Fig. 1.

25 As shown in Fig. 2, the game machine according to the embodiment of the present invention is constructed

005220 332250

such that the entire machine is controlled by a motherboard 10 incorporating a CPU, to which electric power is supplied by a power source 11. A CD-ROM drive 12 is connected to the mother board 10 through an E-IDE (Enhanced Integrated Drive Electronics) port. The monitor 3 is connected to the mother board 10 through an RGB output terminal. The touch panel 4 is connected to the motherboard 10 through a COM interface. A printer 13 is connected to the motherboard 10 through an LPT interface. The speaker 5 is connected to the motherboard 10 through a Line Out interface. A coin controller 14 inclusive of a coin shooter 141 and counter 142, and lighting device 15, such as fluorescent light, are connected to an I/O terminal of the motherboard 10 through a relay substrate 140.

The relay substrate 140 is provided as the need arises for facilitating maintenance. Further, although not described in the embodiment of the present invention, the motherboard 10 comprises a video input terminal for inputting an image picked up by a camera or the like.

Next, the construction of the motherboard 10 is described with reference to Fig. 3.

The main components of the motherboard 10 are: a power circuit 103 connected to the main switch; clock generator 102 for supplying clock signals to each unit;

reset circuit 104 for outputting a reset signal; and CPU 101 for controlling the entire machine. To the CPU bus, a secondary cache memory 111, main memory 113, and chip set A 112 for the peripheral LSI are connected.

- 5 The chip set A 112 includes a memory controller and cache controller, and performs signal conversion between the CPU bus and PCI (Peripheral Component Interconnect) bus.

- 10 The main memory 113 is divided into a normal space 113A, where programs (including OS) and execution data are stored, and a RAM disk 113B serving as a virtual disk drive, as will be described later.

- The PCI bus is controlled by the chip set A 112 and serves as an external bus directly connected to the CPU 101. Components connected to the PCI bus are: a
15 graphic controller 121; chip set B 122; video capture 123 capturing image data by a camera or the like which is optionally connected; and PISA bus slot 124 commonly used by the PCI bus and ISA bus. The graphic
20 controller 121 comprises VRAM where image display data is stored, and includes an RGB output terminal to be connected to the monitor 3 and an output terminal to be connected to a liquid crystal display. The chip set B 122 serves as a bridge between the PCI bus and ISA
25 (Industry Standard Architecture) bus, controls an E-IDE port and USB port which are connected to an external

storage device such as the CD-ROM drive 12, and controls interruption or direct memory access (DMA).

The ISA bus is controlled by the chip set B 122. Components connected to the ISA bus are: a super I/O 131; sound controller 132 having a sound source to be outputted to the speaker 5 and a MIDI interface; basic input output system (BIOS) 133; parallel I/O 134 connected to the coin controller 14 and lighting device 15; and SIMM-ISA conversion connector 135 connected to the ISA bus through an SIMM socket. The super I/O 131 has a COM terminal to be connected to the touch panel 4 serving as a coordinate input apparatus, LPT terminal to be connected to the printer 13, and interfaces for a keyboard, mouse, and floppy disk.

As described above, the game machine according to the embodiment of the present invention is constructed based upon the construction of the PC-AT compatible devices developed by IBM. Note that since the CD-ROM drive 12 serves as an external storage device in the game machine, generally used magnetic-recording-type hard disk is not included in the game machine. However, hard disk may be provided to store other data.

<Description of Start-up Procedure>

Next, start-up processing of the game machine is described with reference to the flowchart in Fig. 4.

When a main switch is turned on in step S41, in
step S42, an electric power is supplied to each unit by
the power circuit 103, then the clock generator 102 is
started for generating clock signals, and a reset
5 signal is inputted from the reset circuit 104 to each
unit of the machine. In step S43, the BIOS 133 is
started. Since the BIOS 133 is set so as to prioritize
the start-up of the CD-ROM drive 12, the CD-ROM drive
12 is first started, and then data is read out of a
10 start-up CD-ROM set in the CD-ROM drive 12 and
developed in the main memory 113.

Fig. 5 is a conceptual view of data recorded in
the start-up CD-ROM. The start-up CD-ROM 50 includes
three types of data: data (system file) 51 for a disk
15 operating system (DOS) such as MS-DOS (registered
trademark of Microsoft) serving as a primary OS; data
52 for Windows (registered trademark of Microsoft)
serving as a secondary OS; and data 53 for an
application program of the game machine. Each of these
20 data is compressed and stored in respective areas.

Note that the Windows data 52 recorded in the
start-up CD-ROM 50 is not the data for installation
which is stored in the generally known set-up disk, but
is an executable file-form data generated by
25 installation processing. By having the file-form
Windows data 52 necessary for the application program

of the game machine, the amount of data recorded in the start-up CD-ROM 50 can be reduced and manufacturing of the start-up CD-ROM can be facilitated. Also, the time lag between the start-up of the machine and start-up of the application program can be reduced.

In step S44 in Fig. 4, the system data 51 for DOS serving as the primary OS, which is recorded in the boot area of the CD-ROM, is first read from the start-up CD-ROM 50 to the main memory 113. When the system data 51 is read, MS-DOS is automatically started. In step S45, the MS-DOS generates the RAM disk 113B which serves as a virtual disk drive in the main memory 113.

In step S46, a part of Windows, serving as the secondary OS, is copied from the start-up CD-ROM 50 to the RAM disk 113B by the DOS. Herein, files to be copied in the RAM disk 113B are files that are rewritten (updated) by the secondary OS during operation of the application program, i.e., swap areas, disk cache, registry files and so forth. In addition, a start-up file (win.comm or the like) necessary for starting the secondary OS (in this case, Windows) is also copied.

According to the game machine of the present embodiment, files that are not rewritten but frequently accessed during operation of the application program, more specifically, a device driver, dynamic link

library, font and so on, are also copied in the RAM disk 113B. By virtue of this, the number of times of accessing the CD-ROM during operation of the application program can be reduced. Accordingly,

- 5 errors caused by mechanical accessing operation of the CD-ROM can be reduced, and the time required for reading data can considerably be reduced.

- After files are copied in the RAM disk 113B, the control proceeds to step S47 where the start-up file
10 copied in the RAM disk 113B is executed. Then, Windows serving as the secondary OS is started by using the RAM disk 113B and start-up CD-ROM 50. After Windows is started, in step S48, the data 53 for the application program is read and the application program is started
15 by using the start-up CD-ROM 50, and operation of the game machine begins.

- By the above-described processing, files of the application program and Windows are read from the start-up CD-ROM 50 as needed during operation of the
20 game machine. The swap area, disk cache, registry files and so on, which are copied in the RAM disk 113B, are rewritten during the operation of the application program.

- To shut off the power of the game machine, the
25 main switch is simply turned off. Thus, the special procedure required for ordinary computers installing

Windows is not necessary. At this stage, the swap area, disk cache, registry files and so on, which are copied in the RAM disk 113B and rewritten during operation of the application program, are deleted without being stored. When the game machine is started the next time, processing according to the above-described flowchart is started with a fresh memory; therefore, the machine can stably be started at any time. Therefore, data generated by a program may be written in the RAM disk 113B.

The game machine can be stably started because, even when Windows is used as an operating system, the game machine does not access a secondary storage having a mechanical access mechanism, e.g., readable/writable magnetic-recording-type hard disk or the like. The game machine is constructed such that, at the time of start-up, data is stably read from read-only memory, i.e., CD-ROM, and files subjected to writing operation are stored in the electrically volatile memory, i.e., RAM disk, generated in the main memory. However, if the magnetic-recording-type hard disk is to be used for reading operation only, hard disk may be provided. In other words, the physical shape of the storage is not an issue here.

According to the above-described game machine of the present embodiment, the following effects are

attained.

-Since an application program can be developed by using an application programming interface of a generally used OS having an established environment, the time and cost required for developing an application program can considerably be reduced.

-The hardware, except particular I/O units which are different for each application program, can be commonly used for all game machines. Accordingly, reliability of the entire game machines can be increased with the reliable common hardware. Moreover, the cost of the hardware can be reduced by mass production.

-When a part of an application program is to be corrected or modified, conventionally ROM must be changed. This required an expert maintenance worker. However, in the game machine of the present embodiment, only the start-up CD-ROM needs to be changed (exchanged). This can be done by any personnel of a game center or the like who does not have expertise of personal computers.

-Although a general-purpose OS, e.g., Windows, is employed, the game machine can be started or shut down stably by simply turning on/off the main switch.

The game machine according to the embodiment of

the present invention employs CD-ROM as a primary storage medium for storing three types of data: primary OS data, secondary OS data, and data for the application program of the game machine. However, as
5 long as these data can be stored and read stably, a primary storage medium other than CD-ROM may be used, for instance, DVD-RAM, ROM or the like may be used. In some cases, hard disk may be used.

Furthermore, in the game machine according to the
10 embodiment of the present invention, files that are rewritten (updated) during operation of the application program are copied in the RAM disk so that writing operation is performed in the RAM disk. However, as long as the CPU can access the secondary storage at
15 high speed, other media or construction may be employed.

Although the above-described embodiment employs Microsoft's MS-DOS as the primary OS and Microsoft's Windows as the secondary OS, the present invention is
20 not limited to this. For instance, UNIX which is a character based user interface (CUI) similar to MS-DOS may be used. As the above-described secondary OS, X Window system (GUI) may be employed. Strictly speaking, X Window does not serve as an OS, but serves
25 as a shell to be used as a UNIX user interface.

In summary, according to the present embodiment,

the environment where the application program is operable must have the following characteristic. More specifically, an OS which supports operation of the application program must execute writing operation in a high-speed volatile storage medium, e.g., RAM drive or the like, in accordance with a request from the OS or application program.

<Description of Application Program>

10 The foregoing description has explained the operation seen from the hardware. Next, the application program (program serving as a sticker printing apparatus) is described.

15 The processing of the application program is roughly divided into two processes: one is sticker printing processing performed when a coin is inserted, and the other is animation display processing performed during non-operation state, i.e., during a period from sticker output to the next coin insertion.

20 Animation display processing is first described.

As mentioned above, animation is generally realized by generating images frame by frame and sequentially displaying the frame images. Thus, the generated amount of data is extremely large. Although the latest processors are capable of considerably fast processing and capable of decoding and displaying

compressed moving images by using software, such
processors are expensive and generation of moving
images is time consuming.

The embodiment of the present invention solves
5 such problems. Inventors of the present invention have
noticed that animation is a collection of relatively
small image parts. In view of this, the inventors have
realized animation by independently controlling update
timing of displaying each image part (hereinafter,
10 referred to as display update timing).

Hereinafter, the principle and processing are
described.

Figs. 6A and 6B show a part of animation image
used in the present embodiment. Shown in Fig. 6A is a
15 *shishimai* (ritual dancer with a lion's mask) dancing
and approaching forward, and shown in Fig. 6B is a
shishimai leaving backward.

This image can be roughly divided into the
following parts (image parts) that constitute the
20 animation: an image 600 of a *torii* (shrine archway) on
the background, image 601 of the *shishimai*'s leg, image
602 of the *shishimai*'s body, and image 603 of the
shishimai's head. Various patterns of these image
parts are prepared and stored in the main memory 113.
25 For instance, the head and leg parts (in some cases,
body part as well) are prepared for the case of facing

forward and backward. In order to express comical movement of the *shishimai*, plural patterns of the body, head, and leg parts facing one direction are prepared.

To realize animation of the image shown in Figs.
5 6A and 6B, the positional relation is defined as follows.

For the purpose of simple description, assume herein that there are two images A and B stored in separate memory areas. When the image A is displayed
10 on top of the image B, i.e., when the images A and B are superimposed and image A is displayed with a higher priority, the positional relation between the images A and B is expressed as "image B < image A" .

In the case of Fig. 6A, the following positional
15 relation holds:

background image 600 < leg image 601 < body image
602 < head image 603

20 In the case of Fig. 6B, the following positional relation holds:

background image 600 < head image 603 < leg image
601 < body image 602

25 (Note that the relation of the head image 603 and leg image 601 may be reversed in Fig 6B.)

005220" 3322560

The embodiment of the present invention manages the less-than signs (<) in layers. In accordance with attribute data set in the image of each layer, reproduction processings of respective layers are performed in parallel (note that reproduction processing includes displaying animation on the screen and playing audio data). The attribute data is stored in the memory 113 in the form of a table.

Fig. 7 is a timing chart of display update processing of each layer for Fig. 6A.

The background image 600 is in the lowest layer, i.e., an image in the bottom of the layers. Display processing of the background image 600 is executed at timing 700, and will not be executed on the layer until a series of animation ends.

Display update processing for the leg, body and body parts on the upper layers is performed by rewriting respective images on the layer at timing 701, 702,, or 703, 704,, or 705, 706,, as shown in Fig. 7 (execution of display update tasks). The display update processing is performed according to the attribute data written respectively for each layer and stored in the main memory 113.

For instance, in the case of the leg image, in order to express various movement of leg, a number of

types of leg image files are prepared. Similarly, a number of types of head image files, e.g., a head image with an open mouse and a head image with a closed mouse and so on, are prepared. Note that the number of files prepared is not equal to the number of times of display update processing shown in Fig. 7. By having attribute data described below, various movement of an image can be expressed.

In the case of an image file, attribute data stored as a table in a predetermined area of the main memory includes: duration from the start of one display processing to the start of the next display processing, display coordinate data, image magnification (reduction) rate, and rotational angle. In the case of an audio file, attribute data includes time data only. Attribute data regarding time and coordinates should be self-explanatory in the above description. Attribute data regarding an image magnification rate and rotational angle is briefly described below. In order to show the image in Fig. 6A as if the *shishimai* is approaching forward from the *torii* (shrine archway), the image size is gradually changed from small to large. The magnification rate is provided as attribute data to realize this movement. In the image shown in Fig. 6B, the image of *shishimai* moving away can be similarly realized. The rotational angle is provided

as attribute data in order to give variation to the movement. Variation can be given to the movement if a large number of images are prepared. However, by providing a rotational angle to the image

5 (particularly, to the head image), various expression can be realized with a small number of images. Note that the inventors of the present invention have confirmed that sufficient animation effect can be attained with about 1 to 0.5 seconds of minimum display
10 update timing, although this depends upon the processor's performance.

Fig. 8 shows a construction of schedule data in each layer, which realizes the display update timing shown in Fig. 7. The schedule data referred to by
15 reference numerals 800 to 806 are executed respectively at the timing 700 to 706 in Fig. 7. As mentioned above, layers controlled by the embodiment of the present invention are not limited to image files, but audio files are also controlled. Since audio files do
20 not have a concept of one data being on top of the other data, audio files only includes time data indicative of duration from the start of one display processing to the start of the next display processing (data for volume setting or the like may be included in
25 the audio files).

Attribute data may also include data regarding a

filter. For filter data, a filter for calculating an average value of a predetermined area (variable size) may be used. Having a filter has the following effect. For instance, by showing the image of *shishimai* with
5 the head being focused and the body and leg being out of focus, *shishimai* can be expressed in perspective. The level of focus may be set for each layer.

Note that the schedule data does not always need to have a file name. For instance, assume that
10 execution of an audio file "onsei.wav" is to be started 10 seconds after starting a series of animation. This means that the audio file is not executed for 10 seconds at the beginning. The schedule data 810 in Fig. 8 has a file name "Null" (used as a reserved word)
15 for not executing the audio file, and the attribute data has "10 seconds". This explanation also applies to an image file.

According to the above-described schedule management, processing of each layer is started at the
20 timing indicated by arrows in Fig. 7. In other words, display processing and audio output processing are performed at respective timing, and no particular processing is performed until the next update timing comes. Other processing is performed by the OS.

25 Note that if the OS does not have a function for displaying an image according to the layers, the

application program constructs a synthesized image at a certain timing and displays the synthesized image. The display timing in this case is determined by the display update timing of one of the layers.

5 Herein, comparison is made with conventional animation reproduction processing. If an image is to be managed by image parts by utilizing the conventional technique, the image parts must be arranged for each display frame, and display processing must be performed
10 frame by frame.

On the contrary, according to the embodiment of the present invention, display images need not be generated frame by frame. Instead, animation display can be realized by deciding a schedule of processing
15 execution timing for each layer. In addition, since the processor's load can be considerably reduced, sufficient quality of animation reproduction can be realized without requiring an expensive high-speed processor.

20 Hereinafter, schedule data for realizing animation from Fig. 6A to Fig. 6B is described.

Fig. 8 shows the schedule of realizing Fig. 6A. In order to realize Fig. 6B, the attribute data is changed so as to read body image data in the layer 3,
25 head image data in the layer 2, leg image data in the layer 1, and background image data in the layer 0

(images read in the layers 2 and 1 may be reversed).

In other words, instead of assigning a priority order to the image parts to be displayed, an image part to be read is assigned to each of the layers set in
5 advance. By this, animation displaying of the images of Figs. 6A and 6B can be realized with one schedule.

Next, processing steps (program processing procedure) of displaying a series of animation are described with reference to the flowchart in Fig. 9.

10 In step S91, animation data (file having a structure shown in Fig. 8), which has the file name designated by the upper processing, is read in the main memory 113. In step S92, the number of layers to be constructed is determined and animation end time is
15 determined based on the read schedule. In step S93, a processing-start timing schedule for each layer is generated and stored in the memory. For instance, in the case of Fig. 7, in order to execute processing for 700, 701, 703 and 705 at the time of start-up and
20 smoothly execute processing for 702 after the lapse of predetermined time (time set by the attribute data in 801 in Fig. 8), the start-up timing and tasks to be executed are arranged in a proper time sequence. This is due to the fact that the timing schedule is defined
25 as attribute data in the memory.

In step S94, it is determined whether or not any

processing-start timing has arrived according to the data generated in step S93. If YES in step S94, the control proceeds to step S95. Then, data required for the tasks (one or plural) to be started is transferred to the VRAM of the graphic controller 121, and the processing is executed. Then, the control returns to step S94. Note that since plural layers cannot be truly simultaneously processed, data is written in the VRAM of the graphic controller 121 from the lower layer first. In the upper layer, an image portion, which overlaps with the image to be written by the upper layer, is saved. However, if the OS is capable of equivalent processing, this processing is not necessary.

15 Meanwhile, if NO in step S94, the control
proceeds to step S96 where it is determined whether or
not the processing for the animation data read in step
S91 (designated by the upper processing) is completed.
If NO in step S96, the control returns to step S94, but
20 if YES, the processing ends.

Hereinafter, the aforementioned upper processing is briefly described.

Animation is not limited to one, but plural types of animation may be provided. In the upper processing, reproduction of plural animation is managed. One animation may be an image of *shishimai* approaching

forward, and the other animation may be an image of *shishimai* leaving backward. Alternatively, completely different animation may be provided.

Alternatively, one animation may include an image
5 of *shishimai* approaching forward and then leaving backward. This can be realized easily.

For instance, referring to the schedule data in Fig. 8, assume that head image data (file name and attribute) of *shishimai* leaving backward is set in the
10 layer 1, leg image data in the layer 2, and body image data in the layer 3 at a certain timing. At an appropriate timing, a magnification rate of these image parts is reduced. By this, an image of *shishimai* approaching and exiting can be realized without
15 changing the layer order.

Note that the above description has been given assuming that the image parts, constructing animation, are stored in CD-ROM and the data is read therefrom. However, the image part data may temporarily be copied
20 in the RAM disk as mentioned above. Then, the image data is written for each layer in a predetermined area of the memory 113, and written in the VRAM of the graphic controller 121 according to attribute data.

As shown in Fig. 10, in a case where plural
25 animation images (animation images A and B in Fig. 10) are repeatedly reproduced (this corresponds to the

upper processing in Fig. 9), if a user inserts a predetermined number of coins in the coin slot 1, sticker printing processing is started as shown in Fig. 10.

5

<Description of Sticker Printing Processing>

A sticker outputted (printed) by the game machine (sticker printing apparatus) according to the embodiment of the present invention has a form of
10 *senjafuda* (hereinafter referred to as a *senjafuda* sticker). An example is shown in Fig. 11. A sheet of *senjafuda* comprises eight pieces of *senjafuda* stickers, so that a user can peel off the sticker one by one and stick it on a desired object. As shown in Fig. 12, a
15 *senjafuda* sticker consists of the following image parts.

More specifically, a *senjafuda* sticker includes:
jimon as a background of the sticker, *kashira* as a header of the sticker, body of the *senjafuda*, and
20 *sashifuda* as an insertion. Plural design patterns are prepared for the *jimon* (background), *kashira* (header), body, and *sashifuda* (insertion) and stored in the main memory 113, then displayed in the monitor 3. A user of the game machine selects a desired design pattern by
25 coordinate input on the touch panel 4. Also, plural character strings are prepared for the *jimon*

(background), *kashira* (header), body, and *sashifuda* (insertion). The user can either select a desired character string from the prepared character strings, or input desired characters.

5 A user sequentially sets image parts in the above-described manner, and instructs printing of a sticker. According to the set contents, printing is performed, and a sheet of stickers as shown in Fig. 11 is printed.

10 Hereinafter, detailed processing steps of sticker printing processing is described with reference to the flowchart in Fig. 13.

 Note that in the following description, assume that the *jimon* (background), *kashira* (header), body, and *sashifuda* (insertion) of each image are managed in
15 layers, and have the priority order of *jimon* < *kashira* < body < *sashifuda*.

 In step S101, contents of various setting are initialized prior to printing process. The
20 initializing processing includes resetting of variables, which represent setting contents of the *jimon*, *kashira*, body, and *sashifuda*.

 In step S102, setting processing for *jimon* (background) (setting processing for the lowest layer
25 image) is performed. In the *jimon* setting processing, plural predetermined *jimon* patterns are written in the

VRAM of the graphic controller 121 and displayed on the monitor 3. A desired *jimon* pattern is selected by the user who designates a coordinate position on the touch panel 4. In this stage, information related to the selected *jimon* pattern is stored in a predetermined area of the main memory 113 as a variable for *jimon*, which has been initialized in step S101.

In step S103, it is determined whether or not the setting for *jimon* is satisfactory to the user by using the touch panel 4. When the user selects to perform setting of the *jimon* again (NG in step S103), the control returns to step S102 by the CPU. In this stage, the *jimon* pattern previously selected by the user is temporarily stored as a bit image in the VRAM of the graphic controller 121 and displayed (enabled by the contents of the variable), so as to allow the user easy selection.

When the user designates to perform the next setting (OK in step S103), the control proceeds to step S104 for performing setting of *kashira* (header) in the main memory 113 (setting processing for the second lowest layer image). In the *kashira* setting processing, the design and the character string to be incorporated in the design (header "戸江" in Fig. 11) are set. To select a design (mainly, selection of a character font and color), plural designs are displayed

and the user selects one by using the touch panel 4 or
inputting a command, as similar to selection of *jimon*
(background). A character string is selected in the
similar manner. The user selects one from character
5 strings prepared in advance. Note that a touch area is
provided on the display screen so as to enable the user
inputting user-original character strings. When the
touch area is touched, a keyboard capable of *kana-kanji*
character conversion (unique to Japanese characters) is
10 displayed, allowing the user to input desired character
strings in a predetermined area of the memory 113.

The set design and character string are stored in
a predetermined area of the main memory 113 as a
variable for *kashira* (header). Therefore, the contents
15 once set can be changed.

In step S105, the control branches in accordance
with the designation from the touch panel 4. More
specifically, if the user designates to perform setting
of *kashira* again (NG in step S105), the control returns
20 to step S104 for performing the setting processing
again. Note that the contents previously set are
stored as default data in a predetermined area of the
main memory 113. By virtue of this, the user can see
the previous setting. In a case where the user has
25 made setting by *kana-kanji* character conversion and
wishes to change the design only but to keep the

selected character string, the user does not need to input the character string again, but only needs to depress an OK button.

5 In the subsequent steps S106 to S109, setting of body and *sashifuda* (insertion) is performed similarly to the above-described setting operation for *kashira*.

Similar to the case of setting *kashira*, contents of previous setting are stored as default data. Therefore, after completing setting processing of each
10 layer, the user can select to perform the setting again. If the user wishes to return to the setting of body after completing the setting of *sashifuda* (insertion), the user can designate return on the touch panel. Then, the control returns from step S109 to
15 step S106 for performing the setting of body again. Since the contents of previous setting is displayed, the user can change a desired part only, and if no other change is to be made, the user depresses a confirm button such as OK button on the touch panel.

20 As the setting processing of each layer is performed, an image of the *senjafuda* sticker constructed up to this point is written in the VRAM of the graphic controller 121 according to the setting contents of each layer, and displayed on a
25 predetermined position of the monitor 3.

After completing setting of the last layer

005220" 8822250

(setting of *sashifuda*), if the user designates to proceed to the next setting processing, the control proceeds to step S110 for option setting. In the option setting according to the embodiment of the present invention, whether to print/not print the *sashifuda* (insertion) is set. This option setting is performed because, in some cases, the character string in the body is hidden by the *sashifuda* (insertion "只今参上") as shown in Fig. 11. If the user designates not to print the *sashifuda*, the set *sashifuda* is not printed in all the sticker body. If the user designates to print the *sashifuda*, half of the stickers (four stickers) is printed with the *sashifuda* and the other half of the stickers is printed without *sashifuda* as shown in Fig. 11.

Since the setting processing of *jimon* (background) has already been mentioned above, hereinafter, the setting processing of *kashira* (header) (step S104) is described further in detail. With respect to the setting processing of body and *sashifuda* (steps S106 and S108), detailed description will not be provided because the same processing as that for *kashira* is performed.

Fig. 14 is a flowchart showing detailed steps of setting processing of *kashira* (header) for a senjafuda sticker according to the present embodiment.

00622E0" 8822E550

In step S201, a list of *kashira* (header) designs stored in the CD-ROM is displayed on the monitor 3, allowing the user to select one on the display screen. On the monitor 3, an OK button and return button or the like are also displayed along with the designs.

Herein, if the user selects a design and depresses the OK button in step S202, the control proceeds to step S203. In step S203, a list of character strings (character strings prepared in advance) to be used as a *kashira* (header) is displayed on the monitor 3, allowing the user to select one. On the monitor 3, an OK button, key input instruction button, cancel button and so on are also displayed.

When the user selects a character string from the list displayed on the monitor 3 by coordinate input on the touch panel, the control proceeds to step S205 where data designating the selected design and character string is written as a variable representing *kashira* (header) and stored. In step S206, a character pattern image is generated with a dot image according to the font data based on the set character string (character code string) and the set design. Then, the generated image data is written as a corresponding layer in a predetermined area of the VRAM of the graphic controller 121, and the dot image is displayed in the predetermined area of the monitor 3. By this,

an image of the *senjafuda* sticker constructed up to this point is displayed for the user. Then, the processing ends.

005220-8824560

In step S204, if the user does not select a
5 character string from the list displayed on the monitor
3, the control proceeds to step S208. In step S208, it
is determined whether or not the user wishes to input a
new user-original character string. If YES in step
S208, the displayed list of character strings is
10 erased, and a keyboard is displayed on the monitor 3.
By touching a displayed key, *kana-kanji* character
conversion is performed. *Kana-kanji* character
conversion is realized by employing a program included
as a standard in Windows. Since a keyboard is not
15 provided physically, a driver program for touch
keyboard is prepared to simulate a physical keyboard.
Data is transferred from the driver program to the
kana-kanji conversion processor. In order to improve
operability and achieve user-friendly and accurate
20 *kana-kanji* character conversion, character conversion
is performed word by word.

The above description has been provided for the
setting processing of *kashira*. The setting processing
of the body and *sashifuda* are similarly performed.

25 As apparent from Fig. 11, the *sashifuda*
(insertion) is not only superimposed upon the character

image on the lower layer, but is arranged at an angle. This is realized because, as has been described above, when the design and character string are set, the application program obtains (generates) image data
5 based on the contents of the setting and stores the data independently in the memory, unlike general word processors which let an OS perform the display processing of a character string and design set in each layer. Since image data for each layer is
10 independently stored in the memory, printing the *sashifuda* at an angle can easily be achieved by rotation processing (rotating *sashifuda* by a given angle). As a result, stickers with *sashifuda* shown in Fig. 11 are printed.

15 Referring back to Fig. 13, if the option setting is OK in step S111, printing processing is performed in step S112.

In general, resolution of a display screen of a game machine is about 75 dpi. Assume that the monitor
20 3 in the present embodiment has resolution of 75 dpi. The printer 13 in the present embodiment employs an ink-jet type printer applying heat energy, which is capable of printing sufficiently high quality images, e.g., 1400 dpi. In the present embodiment, assume that
25 the printer 13 has a resolution of 600 dpi for each color component.

Assume that the synthesized image of the sheet of stickers, which is generated by the above-described setting operation and displayed on the screen for user's confirmation, has a size twice as large as the actually printing image. The displayed image cannot be printed in such size, because the resultant printed image would have a size of $75 \times 2 / 600 = 1/4$.

In view of this, when printing is performed, a variable which is allocated for each layer in the main memory and contains setting contents is referred, and an image to be printed is generated for each layer in the main memory. For a *jimon* (background) image, two types of images, one to be displayed and the other to be printed, are already prepared and stored in advance in the CD-ROM. From this CD-ROM, a variable representing the *jimon* image to be printed is read and stored in the main memory. Then, a print image for *kashira* (header), which is positioned logically higher than the *jimon* (background), is generated according to the character code string, font and font size which have been set in the variable for *kashira*. Then, the generated print image data for *kashira* is written on top of the print image data for *jimon*. Next, a print image for body, which is the layer higher than the *kashira* layer, is generated according to the character code string, font, and font size which have been set in

the variable for the body. Then, the generated print image data for body is written to be synthesized with the already-generated image (synthesized image of *jimon* and *kashira*). In a case where the user selects not to
5 print *sashifuda* (insertion) in the option setting, eight stickers of the above synthesized image is printed.

In a case where the user selects to print *sashifuda* (insertion) in the option setting, the above
10 synthesized image generated so far (synthesized image of *jimon*, *kashira* and body) is generated (copied) in another predetermined area of the main memory. Then, a print image for *sashifuda*, represented by a variable, is generated. The generated print image for *sashifuda*
15 is rotated by a predetermined angle, and synthesized with the copied image in the main memory. By the above processing, two types of synthesized image data, one with *sashifuda* and the other without *sashifuda*, are generated. Based on these image data, four stickers
20 are generated for each image (see Fig. 11).

Note herein that the image for printing is generated only if the user designates to proceed from the option setting. This is because, as apparent from the description of hardware of the game machine of the
25 embodiment, the machine does not have a hard disk for generating a temporary file, and thus the machine must

efficiently utilize the limited main memory and RAM
disk (disk drive generated logically in the file
system). More specifically, if an image for printing
is generated in the setting of each layer, a large
5 amount of memory shall be consumed.

The image data ultimately necessary is not the
image data for each layer, but is the synthesized image
data to be printed. According to the above-described
processing of the present embodiment, the memory
10 necessary for the synthesized image data is small, so
that data generation can be efficiently performed.
Note in a case where the user selects to print
sashifuda (insertion) in the option setting, two types
of synthesized image data (with *sashifuda* and without
15 *sashifuda*) are generated in the above description.
However, since the *sashifuda* image is small, the
synthesized image data without *sashifuda* and image data
of *sashifuda* only may be independently stored in the
main memory, and printing may be performed while
20 controlling, in real time, whether to synthesize or not
synthesize the *sashifuda* image. By this, the necessary
memory capacity is further reduced.

Note that in the above-described embodiment, the
animation display is executed during a period from
25 sticker output to the next coin insertion. However,
the animation may be displayed while stickers are being

printed, by using an available area of the monitor 3.
Alternatively, a machine displaying animation only may
be provided.

Furthermore, although the aforementioned
5 embodiment describes printing *senjafuda* stickers as an
example, the present invention is not limited to this.

The present invention is not limited to the
aforementioned game machine, but is widely applicable
to machines which execute particular applications,
10 e.g., vending machines or industrial machines or the
like.

As has been set forth above, according to the
present invention, it is possible to realize relatively
easy animation display without requiring a special
15 resource, and to easily generate the animation.

Furthermore, a number of user-original character
strings can be inputted, and varieties of stickers can
be printed by superimposing the inputted character
strings.

20 Still further, not only a number of character
strings and designs can be set as desired, but also a
part of the already-set characters or designs can be
easily corrected.

The present invention is not limited to the above
25 embodiments and various changes and modifications can
be made within the spirit and scope of the present

invention. Therefore, to apprise the public of the scope of the present invention, the following claims are made.

006220" 88222560

WHAT IS CLAIMED IS:

1. An animation display apparatus for
combining a plurality of image parts and displaying
5 animation, comprising:
image storage means for storing the image parts;
processor means for executing display processing,
which is divided into a plurality of logical layers, in
unit of each layer, said display processing performed
10 for each image part constructing animation to be
displayed;

setting means for setting at least one schedule
data for each layer, said schedule data having data
which specifies an image part to be displayed, and
15 attribute data which includes display update timing;
and

control means for controlling processing, set by
said setting means and performed by processor means of
each layer, in accordance with the schedule data.
20

2. The animation display apparatus according
to claim 1, wherein the attribute data includes data
related to a display position of an image part.

25 3. The animation display apparatus according
to claim 1, wherein the attribute data includes data

related to a rotational angle of an image part.

4. The animation display apparatus according to claim 1, wherein the attribute data includes data
5 related to a magnification rate of an image part.

5. The animation display apparatus according to claim 1, wherein the attribute data includes data related to a coefficient for filtering an image part.
10

6. A control method of animation display apparatus for combining a plurality of image parts and displaying animation, comprising:

a processing step of executing display
15 processing, which is divided into a plurality of logical layers, in unit of each layer, said display processing performed for each image part constructing animation to be displayed;

a setting step of setting at least one schedule
20 data for each layer, said schedule data having data which specifies an image part stored in a predetermined storage, and attribute data which includes display update timing; and

a control step of controlling processing, set in
25 said setting step and performed by a processor of each layer, in accordance with the schedule data.

processor means for executing display processing,
which is divided into a plurality of logical layers, in
unit of each layer, said display processing performed
for each image part constructing animation to be

5 displayed;

setting means for setting at least one schedule
data for each layer, said schedule data having data
which specifies an image part to be displayed, and
attribute data which includes display update timing;

10 and

control means for controlling processing, set by
said setting means and performed by processor means of
each layer, in accordance with the schedule data.

15 9. A control method of a game machine for
executing a game when a coin is inserted and displaying
animation when a coin is not inserted, comprising:

a processing step of executing display
processing, which is divided into a plurality of
20 logical layers, in unit of each layer, said display
processing performed for each image part constructing
animation to be displayed;

a setting step of setting at least one schedule
data for each layer, said schedule data having data
25 which specifies an image part to be displayed, and
attribute data which includes display update timing;

and

a control step of controlling processing, set in said setting step and performed at a processing step of each layer, in accordance with the schedule data.

5

10. A storage medium storing program codes to serve as a game machine, which executes a game when a coin is inserted and displays animation when a coin is not inserted, by having a computer read and execute the program codes, said program codes having functions including:

image parts storage means for storing a plurality of image parts used for animation display;

processor means for executing display processing, which is divided into a plurality of logical layers, in unit of each layer, said display processing performed for each image part constructing animation to be displayed;

setting means for setting at least one schedule data for each layer, said schedule data having data which specifies an image part to be displayed, and attribute data which includes display update timing; and

control means for controlling processing, set by said setting means and performed by processor means of each layer, in accordance with the schedule data.

11. An animation display apparatus comprising:
start-up means for initiating start-up operation
from a storage medium which stores an OS;

5 preliminary processor means for rewriting data,
subjected to be written in secondary volatile storage
means at least while the OS is operating, to
predetermined data based on the storage medium,
said secondary volatile storage means being accessible
10 by a CPU in a first stage of each start-up and having a
file system;

means for initiating the OS to operate in a
second stage which is after rewriting operation is
performed by said preliminary processor means;

15 processor means for executing display processing,
which is divided into a plurality of logical layers, in
unit of each layer under the operation of the OS, said
display processing performed for each image part
constructing animation to be displayed;

20 setting means for setting at least one schedule
data for each layer, said schedule data having data
which specifies an image part to be displayed, and
attribute data which includes display update timing;
and

25 control means for controlling processing, set by
said setting means and performed by processor means of

each layer, in accordance with the schedule data.

12. A game machine having a computer for
executing an application program, comprising:

5 start-up means for initiating start-up operation
from a storage medium, storing an OS and said
application program in a directly executable form;

preliminary processor means for copying data from
the storage medium, the data subjected to be written in
10 a secondary volatile storage at least while the OS and
the application program are operating, said secondary
volatile storage means being accessible by a CPU in a
first stage of start-up and having a file system;

means for initiating the OS to operate in a
15 second stage which is after copying operation is
performed by said preliminary processor means;

processor means for executing display processing,
which is divided into a plurality of logical layers, in
unit of each layer under the operation of the OS and
20 the application program, said display processing
performed for each image part constructing animation to
be displayed;

setting means for setting at least one schedule
data for each layer, said schedule data having data
25 which specifies an image part to be displayed, and
attribute data which includes display update timing;

and

control means for controlling processing, set by said setting means and performed by processor means of each layer, in accordance with the schedule data.

5

13. A display apparatus comprising:

start-up means for initiating start-up operation from a storage medium which stores an OS;

preliminary processor means for rewriting data,
10 subjected to be written in secondary volatile storage means at least while the OS is operating, to predetermined data based on the storage medium, said secondary volatile storage means being accessible by a CPU in a first stage of each start-up and having a
15 file system;

means for initiating the OS to operate in a second stage which is after rewriting operation is performed by said preliminary processor means;

reading means for reading an image stored in a
20 plurality of storage areas under the operation of the OS;

setting means for setting at least one attribute data, which includes timing for reading an image stored in the plurality of storage areas, in association with
25 an image stored in the plurality of storage areas; and display control means for displaying respective

images, stored in the plurality of storage areas and read by said reading means, based on the attribute data set by said setting means.

- 5 14. A display apparatus comprising:
- start-up means for initiating start-up operation from a storage medium which stores an OS;
- preliminary processor means for rewriting data, subjected to be written in secondary volatile storage
- 10 means at least while the OS is operating, to predetermined data based on the storage medium, said secondary volatile storage means being accessible by a CPU in a first stage of each start-up and having a file system;
- 15 means for initiating the OS to operate in a second stage which is after rewriting operation is performed by said preliminary processor means;
- image reading means for reading an image stored in a plurality of storage areas under the operation of
- 20 the OS;
- attribute reading means for reading attribute data which includes timing for reading an image stored in the plurality of storage areas; and
- display control means for displaying respective
- 25 images, stored in the plurality of storage areas, read by said image reading means, based on the attribute

data read by said attribute reading means.

15. A display apparatus comprising:

- start-up means for initiating start-up operation
5 from a storage medium which stores an OS;
- preliminary processor means for rewriting data,
subjected to be written in secondary volatile storage
means at least while the OS is operating, to
predetermined data based on the storage medium,
10 said secondary volatile storage means being accessible
by a CPU in a first stage of each start-up and having a
file system;
- means for initiating the OS to operate in a
second stage which is after rewriting operation is
15 performed by said preliminary processor means;
- image reading means for reading an image stored
in a plurality of storage areas under the operation of
the OS;
- setting means for setting attribute data which
20 includes audio data defined in association with at
least one image stored in the plurality of storage
areas; and
- output control means for outputting audio data
based on the attribute data, and displaying respective
25 images, stored in the plurality of storage areas and
read by said image reading means, based on the

attribute data set by said setting means.

16. A sticker printing apparatus, including
said animation display apparatus according to claim 1,
5 for printing a desired sticker by operating a touch
panel overlaid on a display screen, said sticker
printing apparatus comprising:

input means for inputting a plurality of
character strings to be printed on a sticker, in
10 association with a logical layer;

storage means for generating bit image data
corresponding to an inputted character string and
storing the bit image data, each time a character
string is inputted by said input means;

15 layout means for superimposingly laying out each
of the stored bit image data for each layer; and

output means for outputting image data, obtained
by said layout means, to printing means.

20 17. A sticker printing apparatus for printing a
desired sticker by operating a touch panel overlaid on
a display screen, comprising:

input means for inputting a plurality of
character strings to be printed on a sticker, in
25 association with a logical layer;

storage means for generating bit image data

corresponding to an inputted character string and
storing the bit image data, each time a character
string is inputted by said input means;

layout means for superimposingly laying out each
5 of the stored bit image data for each layer; and

output means for outputting image data, obtained
by said layout means, to printing means.

18. The sticker printing apparatus according to
10 claim 17, further comprising setting means for setting
a background design for the sticker.

19. The sticker printing apparatus according to
claim 17, wherein said input means comprises:

15 means for displaying predetermined sample
character strings on the display screen;

means for selecting a character string from the
displayed sample character strings by using the touch
panel;

20 means for setting the touch panel as character
input means; and

means for displaying a virtual keyboard for
character input operation when the touch panel is set
as character input means.

25

20. The sticker printing apparatus according to

claim 19, wherein said input means comprises means for setting a character design.

21. The sticker printing apparatus according to claim 17, wherein the sticker has a form of *senjafuda* consisting of *kashira* (header), main body of the *senjafuda*, and *sashifuda* (insertion), wherein said input means inputs respective character strings for the *kashira* (header), main body, and *sashifuda* (insertion).

22. The sticker printing apparatus according to claim 21, wherein said printing means prints plural stickers on one sheet.

23. The sticker printing apparatus according to claim 22, further comprising means for setting whether or not to insert the *sashifuda* (insertion), wherein in a case the *sashifuda* (insertion) is to be inserted, a part of the stickers in one sheet are printed with the *sashifuda* (insertion).

24. The sticker printing apparatus according to claim 17, further comprising:

memory means for storing data inputted by said input means; and
designation means for designating to return to an

input subject for changing already-inputted data,
wherein in a case where said designation means
designates to return to an input subject, contents
stored in said memory means are used as a default
5 setting of the input subject.

25. A control method of a sticker printing
apparatus for printing a desired sticker by operating a
touch panel overlaid on a display screen, comprising:
10 an input step of inputting a plurality of
character strings to be printed on a sticker, in
association with a logical layer;
a storage step of generating bit image data
corresponding to an inputted character string and
15 storing the bit image data, each time a character
string is inputted in said input step;
a layout step of superimposingly laying out each
of the stored bit image data for each layer; and
an output step of outputting image data, obtained
20 in said layout step, to a printing unit.

26. A storage medium storing program codes to
serve as a sticker printing apparatus, which prints a
desired sticker by operating a touch panel overlaid on
25 a display screen, said program codes having functions
including:

input means for inputting a plurality of
character strings to be printed on a sticker, in
association with a logical layer;

storage means for generating bit image data
5 corresponding to an inputted character string and
storing the bit image data, each time a character
string is inputted by said input means;

layout means for superimposingly laying out each
of the stored bit image data for each layer; and

10 output means for outputting image data, obtained
by said layout means, to printing means.

27. An apparatus comprising:

start-up means for initiating start-up operation
15 from a storage medium which stores an OS;

preliminary processor means for rewriting data,
subjected to be written in secondary volatile storage
means at least while the OS is operating, to
predetermined data based on the storage medium,
20 said secondary volatile storage means being accessible
by a CPU in a first stage of each start-up and having a
file system;

means for initiating the OS to operate in a
second stage which is after rewriting operation is
25 performed by said preliminary processor means;

input means for inputting, in association with a

logical layer, a plurality of character strings to be printed on print paper under the operation of the OS;

storage means for generating bit image data corresponding to an inputted character string and
5 storing the bit image data, each time a character string is inputted by said input means;

layout means for superimposingly laying out each of the stored bit image data for each layer; and

output means for outputting image data, obtained
10 by said layout means, to printing means.

28. A sticker printing apparatus comprising:

start-up means for initiating start-up operation from a storage medium, storing an OS and said
15 application program in a directly executable form;

preliminary processor means for copying data from the storage medium, the data subjected to be written in a secondary volatile storage at least while the OS and the application program are operating, said secondary
20 volatile storage means being accessible by a CPU in a first stage of start-up and having a file system;

means for initiating the OS to operate in a second stage which is after copying operation is performed by said preliminary processor means;

25 input means for inputting, in association with a logical layer, a plurality of character strings to be

printed on a sticker under the operation of the OS;

storage means for generating bit image data
corresponding to an inputted character string and
storing the bit image data, each time a character
5 string is inputted by said input means;

layout means for superimposingly laying out each
of the stored bit image data for each layer; and

output means for outputting image data, obtained
by said layout means, to printing means.

10

29. A sticker printing apparatus comprising:

start-up means for initiating start-up operation
from a storage medium which stores an OS;

15 preliminary processor means for rewriting data,
subjected to be written in secondary volatile storage
means at least while the OS is operating, to
predetermined data based on the storage medium,
said secondary volatile storage means being accessible
by a CPU in a first stage of each start-up and having a
20 file system;

means for initiating the OS to operate in a
second stage which is after rewriting operation is
performed by said preliminary processor means;

25 generation means for generating a sticker image
by combining a plurality of character strings or a
plurality of images to be printed on a sticker under

the operation of the OS; and

print means for printing a plurality of the generated sticker images on print paper.

- 5 30. A sticker printing apparatus comprising:
- start-up means for initiating start-up operation from a storage medium which stores an OS;
- preliminary processor means for rewriting data, subjected to be written in secondary volatile storage
- 10 means at least while the OS is operating, to predetermined data based on the storage medium, said secondary volatile storage means being accessible by a CPU in a first stage of each start-up and having a file system;
- 15 means for initiating the OS to operate in a second stage which is after rewriting operation is performed by said preliminary processor means;
- means for storing each of a plurality of character strings or a plurality of images to be
- 20 printed on a sticker in a plurality of storage areas under the operation of the OS;
- generation means for generating a sticker image by superimposingly combining the plurality of character strings or the plurality of images stored in the
- 25 plurality of storage areas; and
- print means for printing a plurality of the

generated sticker images on print paper.

31. A sticker printing apparatus comprising:
- start-up means for initiating start-up operation
- 5 from a storage medium which stores an OS;
- preliminary processor means for rewriting data, subjected to be written in secondary volatile storage means at least while the OS is operating, to predetermined data based on the storage medium,
- 10 said secondary volatile storage means being accessible by a CPU in a first stage of each start-up and having a file system;
- means for initiating the OS to operate in a second stage which is after rewriting operation is
- 15 performed by said preliminary processor means;
- means for storing each of a plurality of character strings or a plurality of images to be displayed, in a plurality of storage areas under the operation of the OS;
- 20 generation means for generating a sticker image by superimposingly combining the plurality of character strings or the plurality of images stored in the plurality of storage areas;
- replacing means for replacing each of the
- 25 plurality of character strings or the plurality of images, constructing the superimposingly combined

sticker image;


print means for printing a sticker image having one of the plurality of character strings or the plurality of images replaced by said replacing means.

005220" 88242550

ABSTRACT OF THE DISCLOSURE

The present invention enables relatively easy animation display without requiring a special resource, and facilitates easy generation of the animation. When an image to be displayed as animation is constructed with a background, leg, body and head, these images are distributed as a layer. For each layer, a timing schedule is set with attribute data which includes display update timing and display effects. According to the schedule, display for each layer is updated at the scheduled timing.

FIG. 1

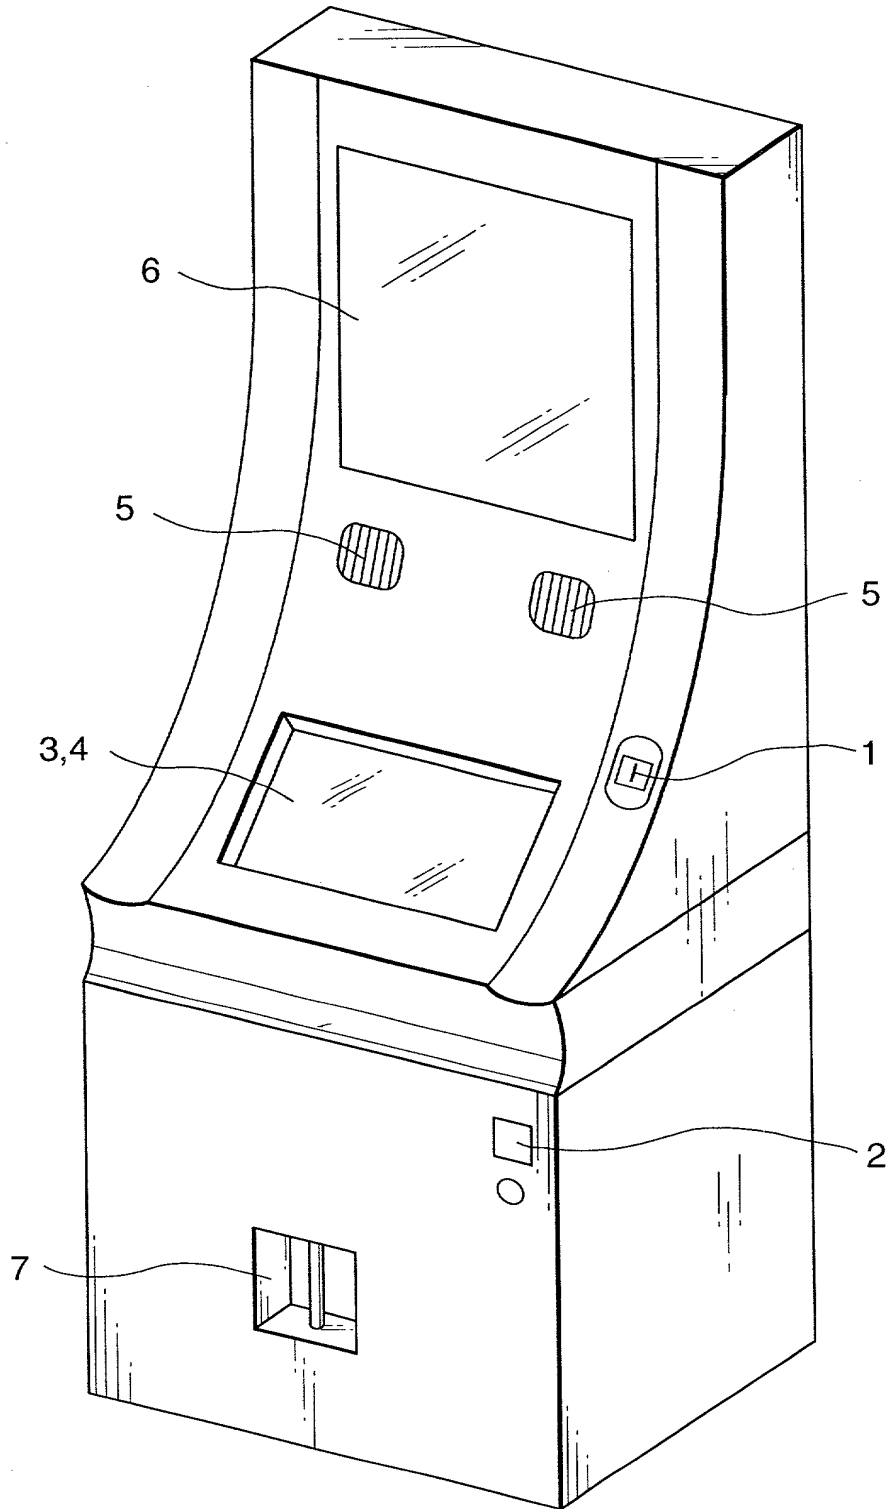

006220-8824560

FIG. 2

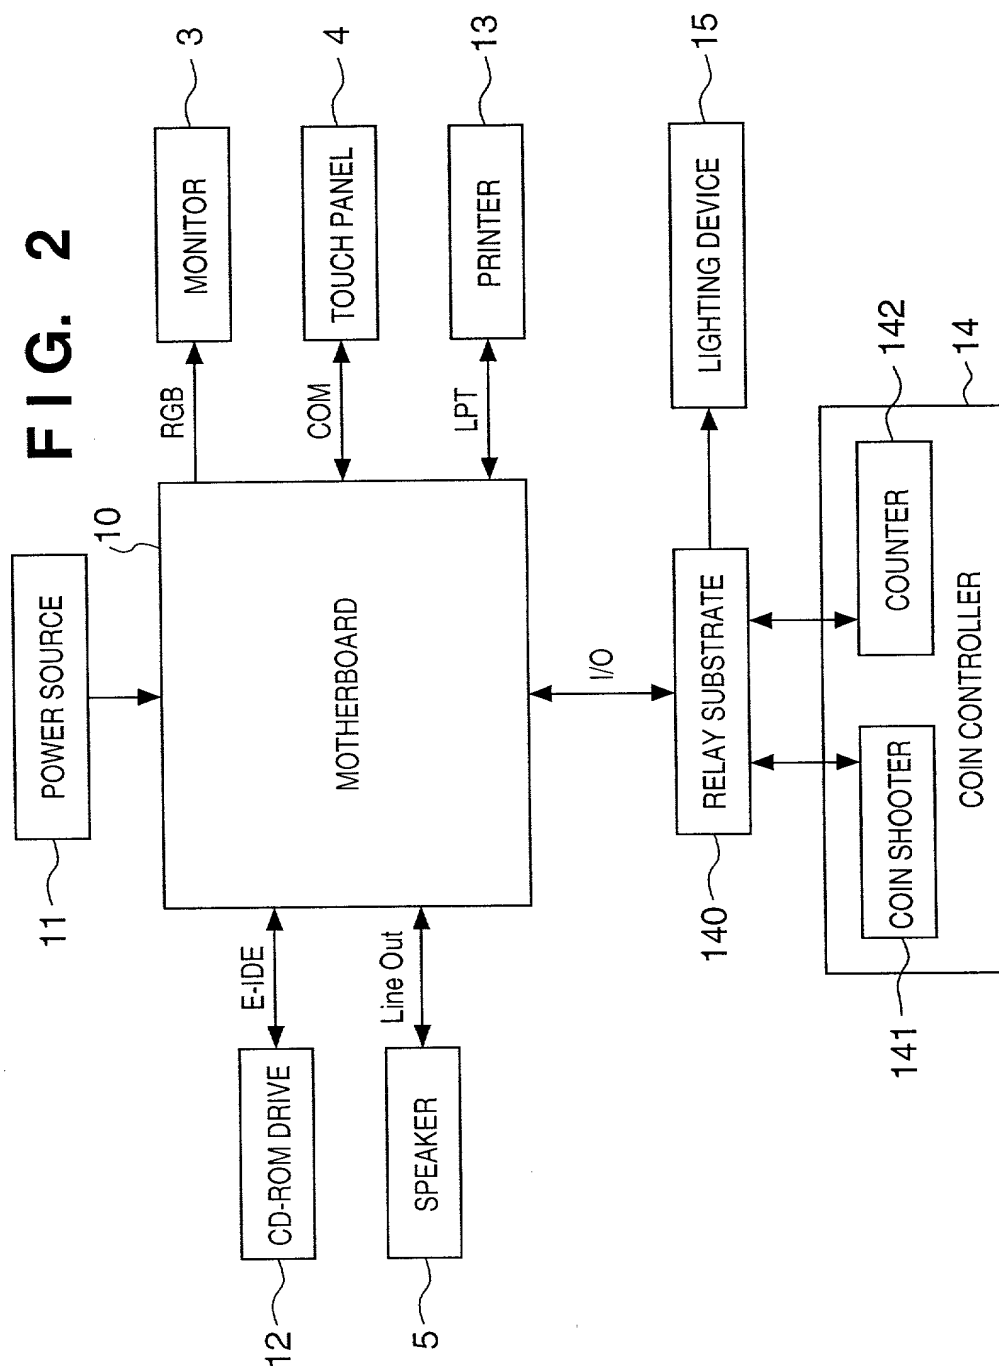


FIG. 3

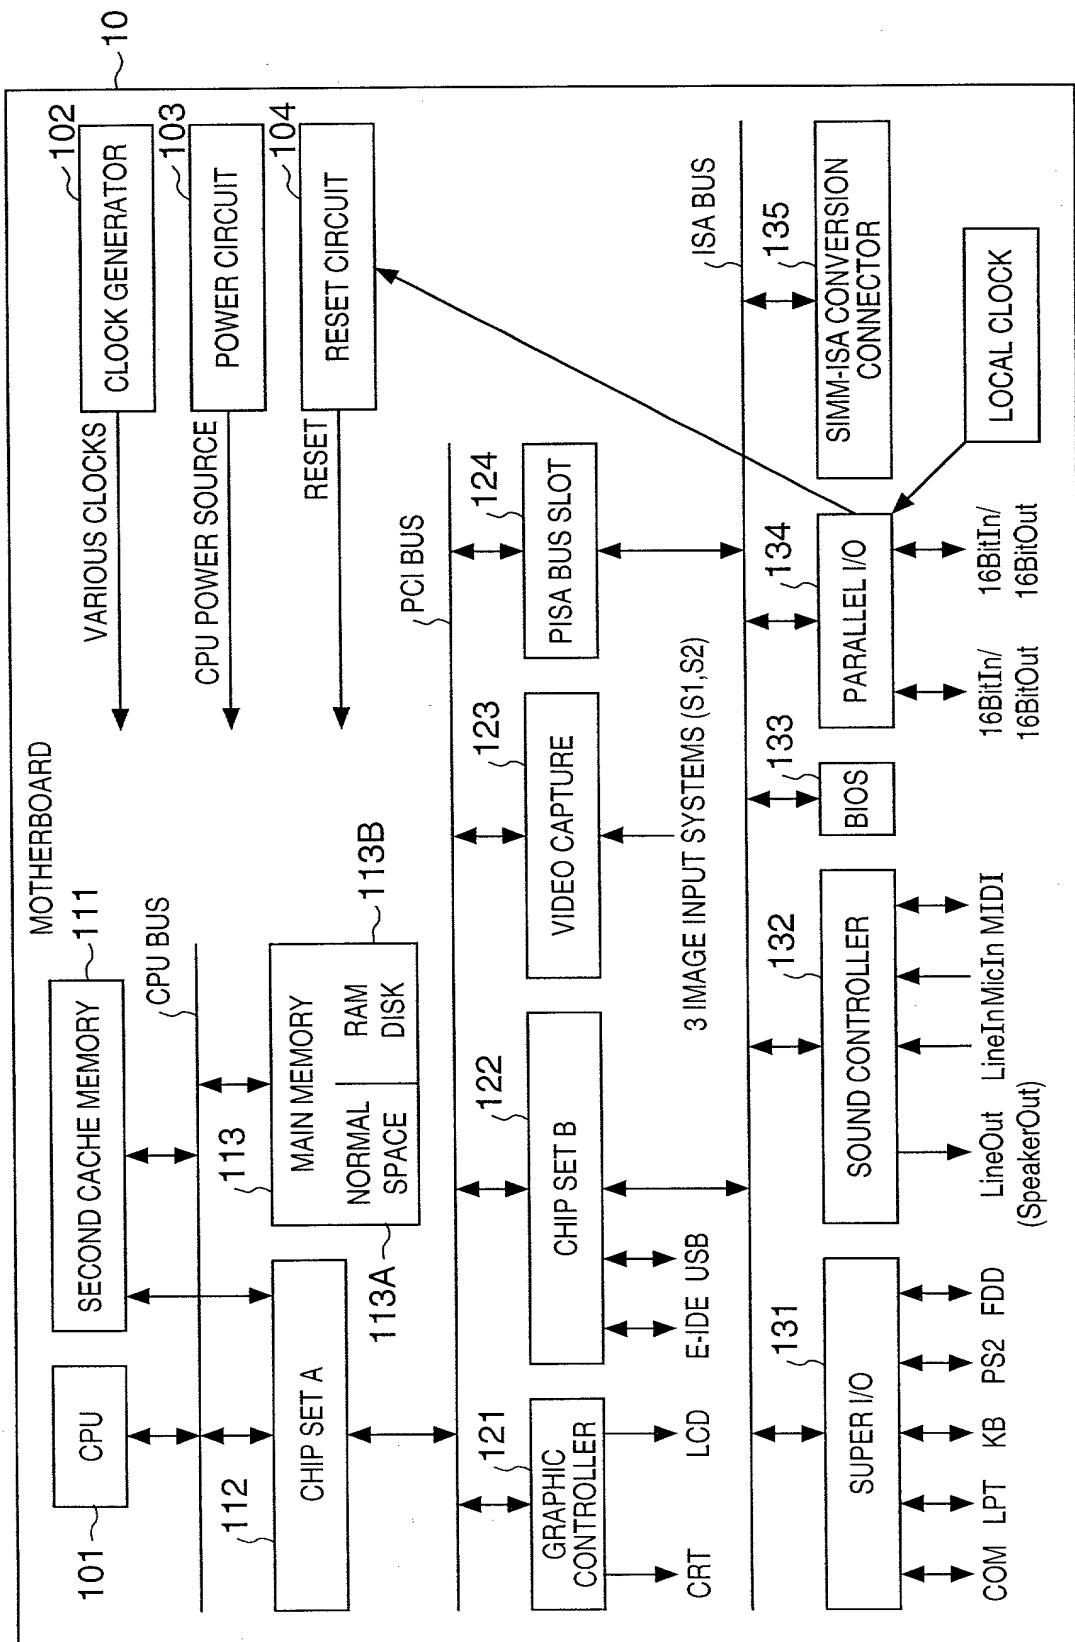


FIG. 5

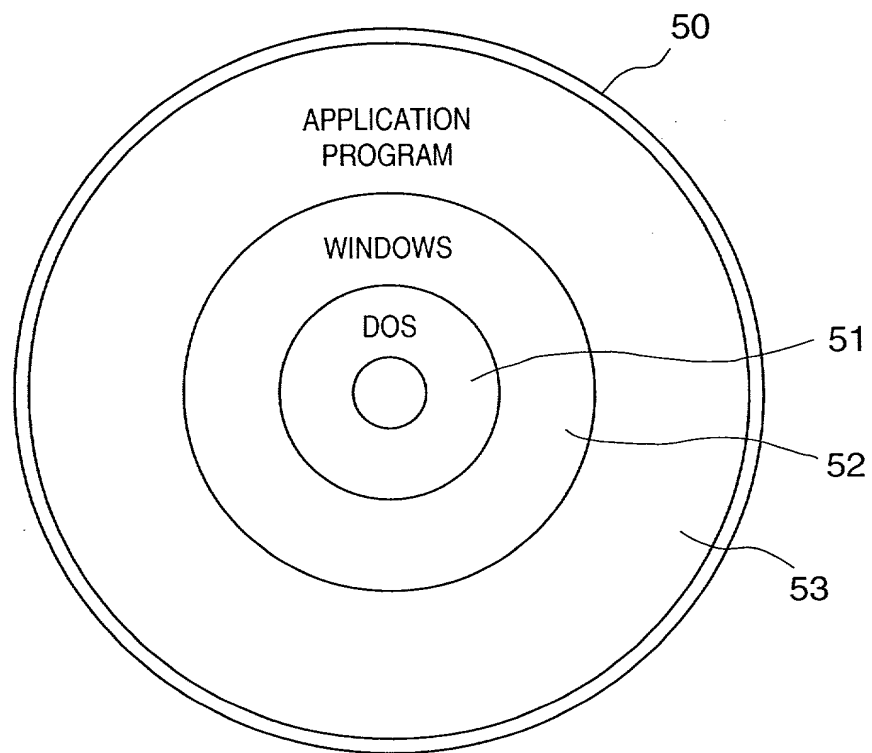


FIG. 6B

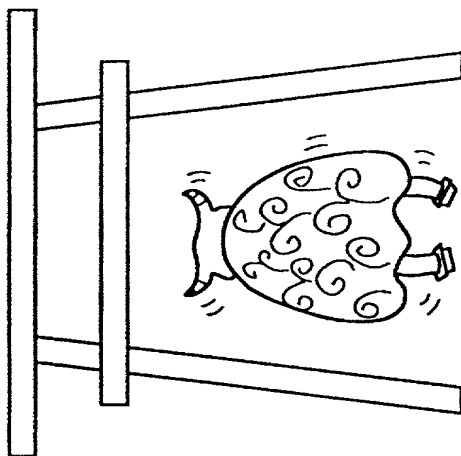


FIG. 6A

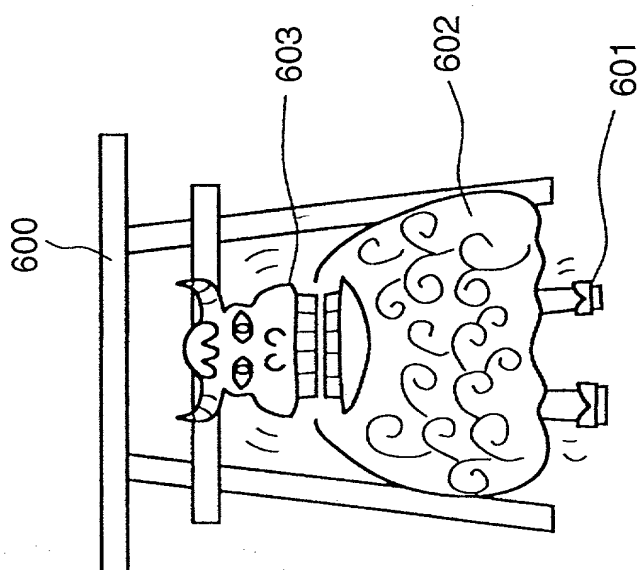


FIG. 7

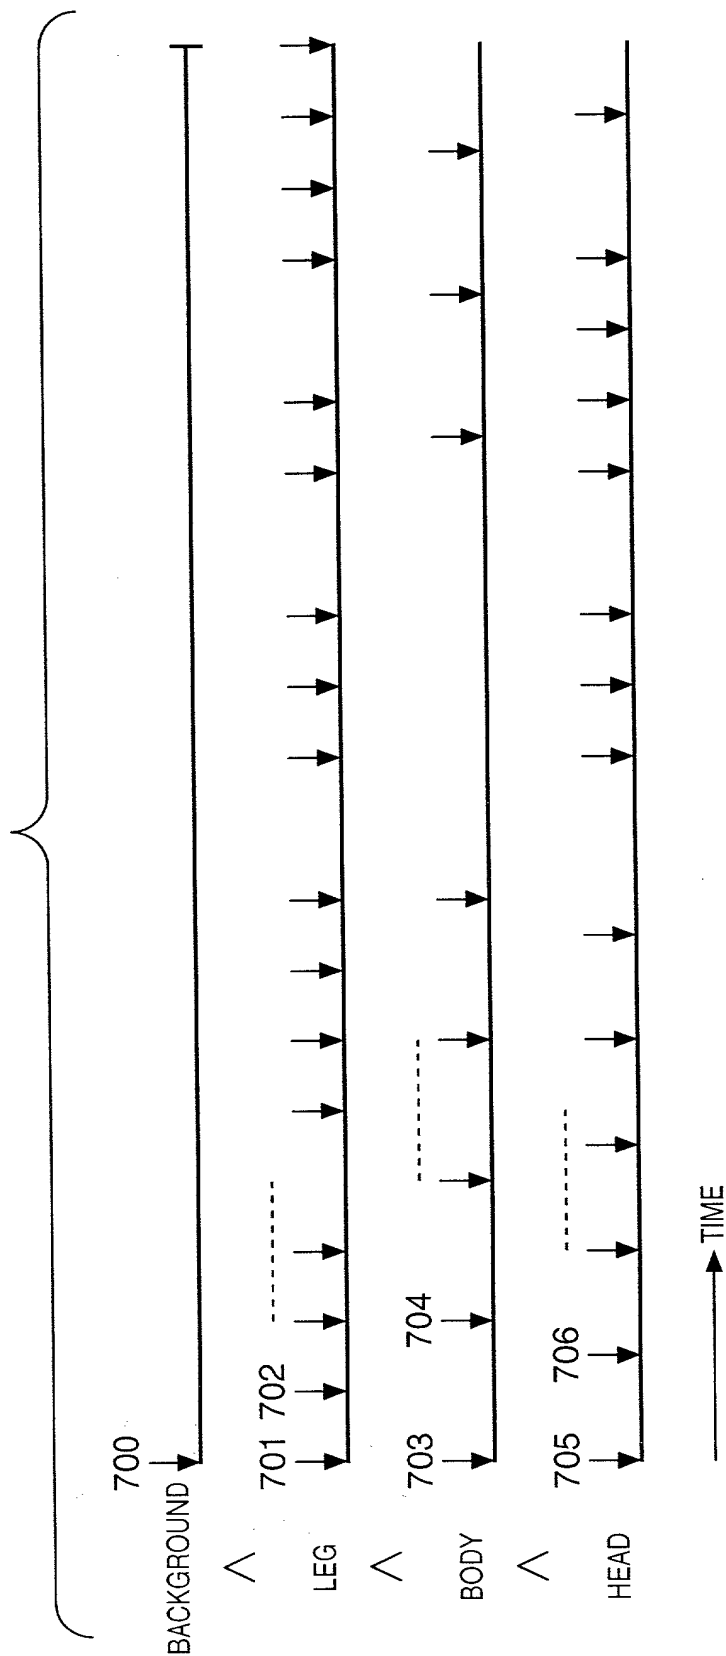


FIG. 8

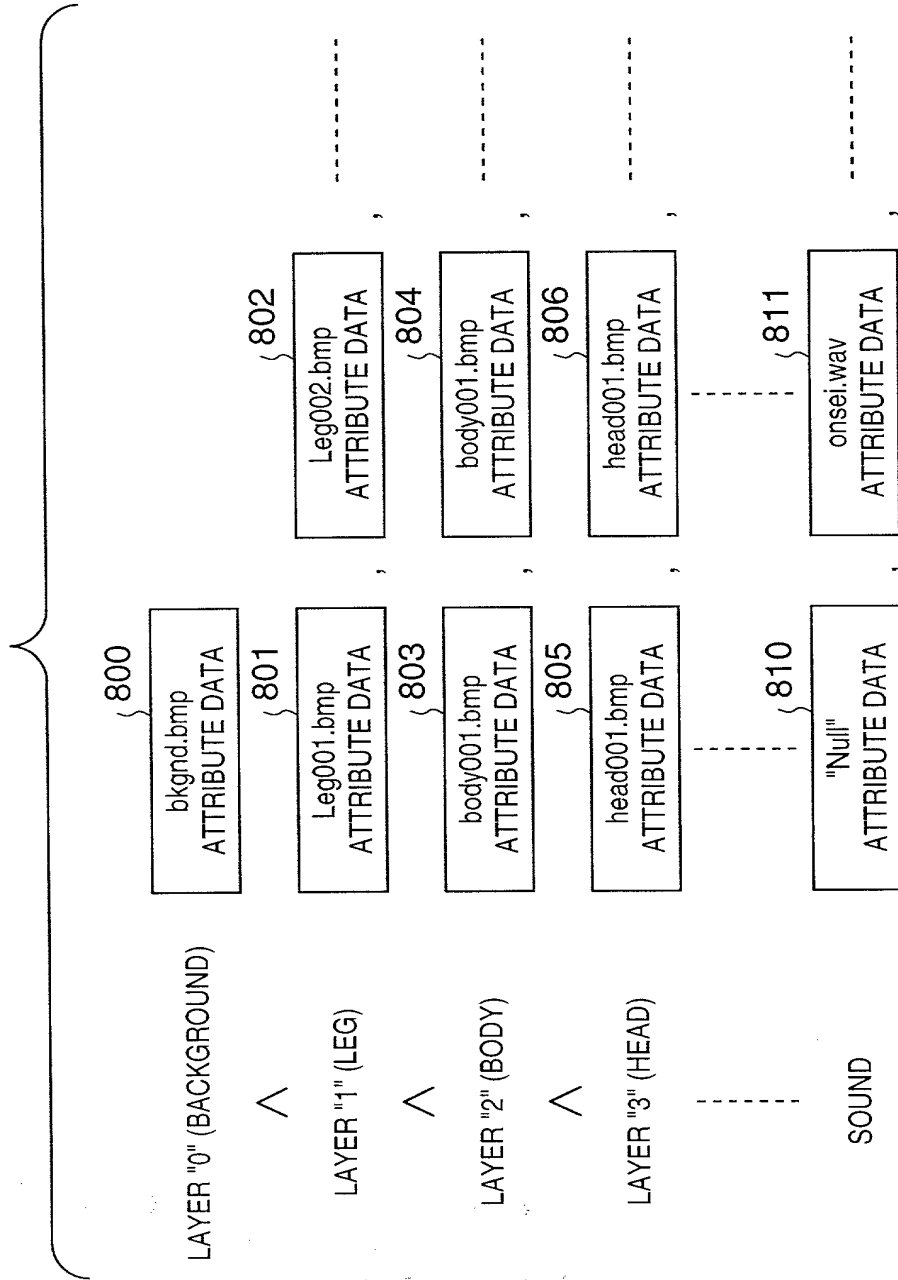


FIG. 9

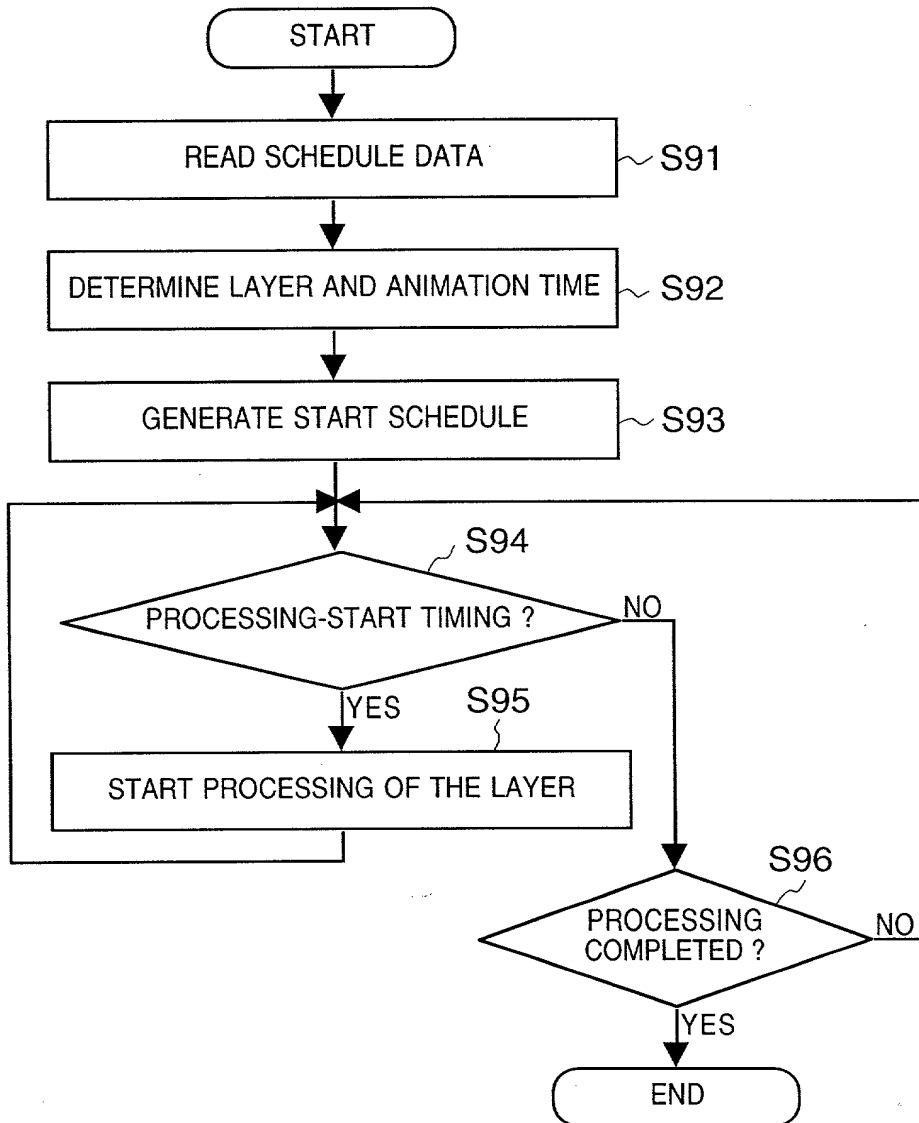


FIG. 10


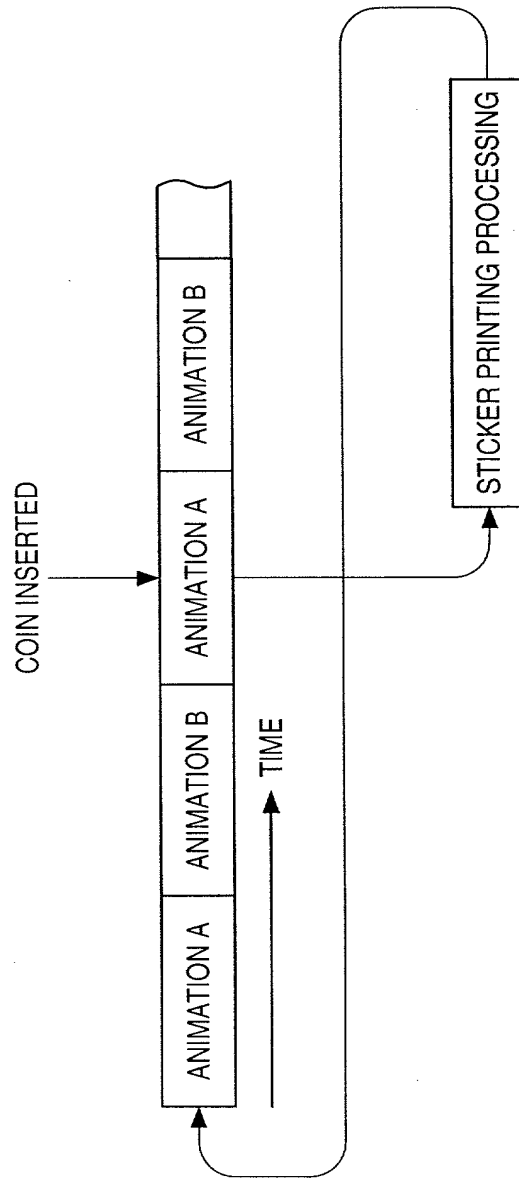


FIG. 11

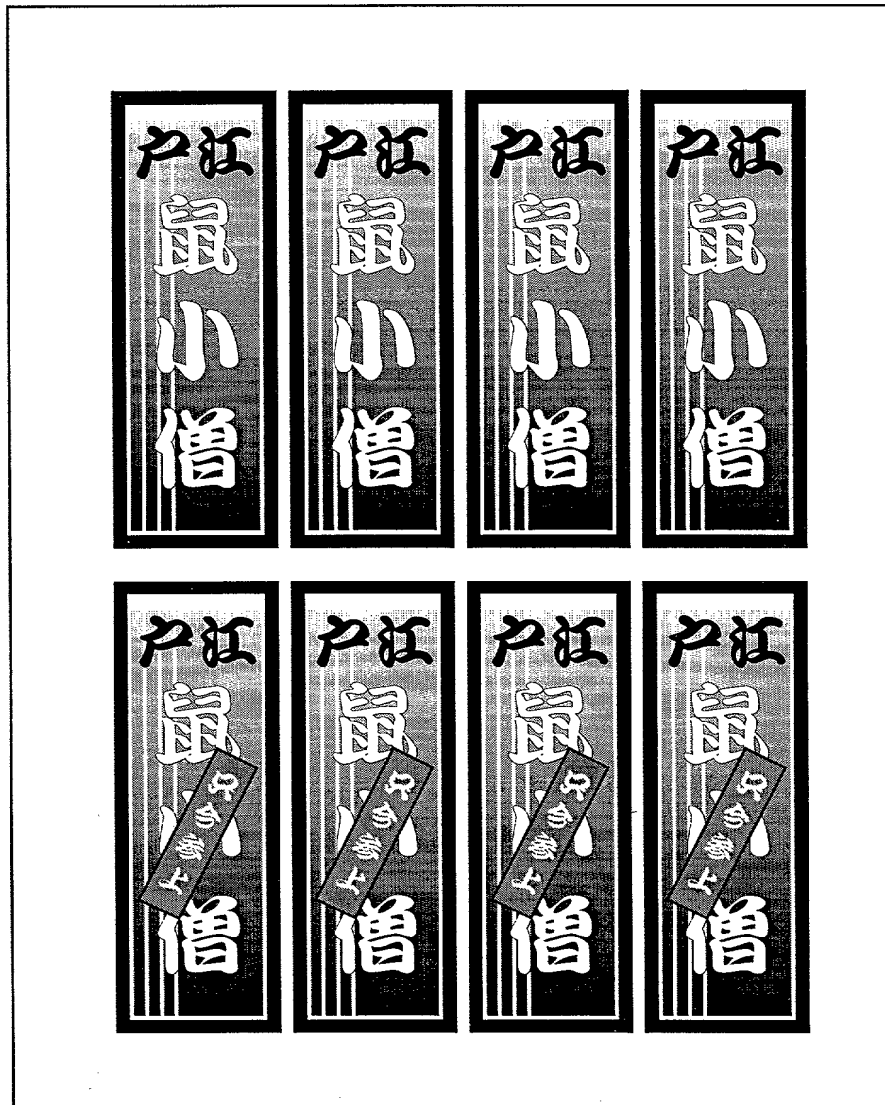

006220-8822E560

FIG. 12

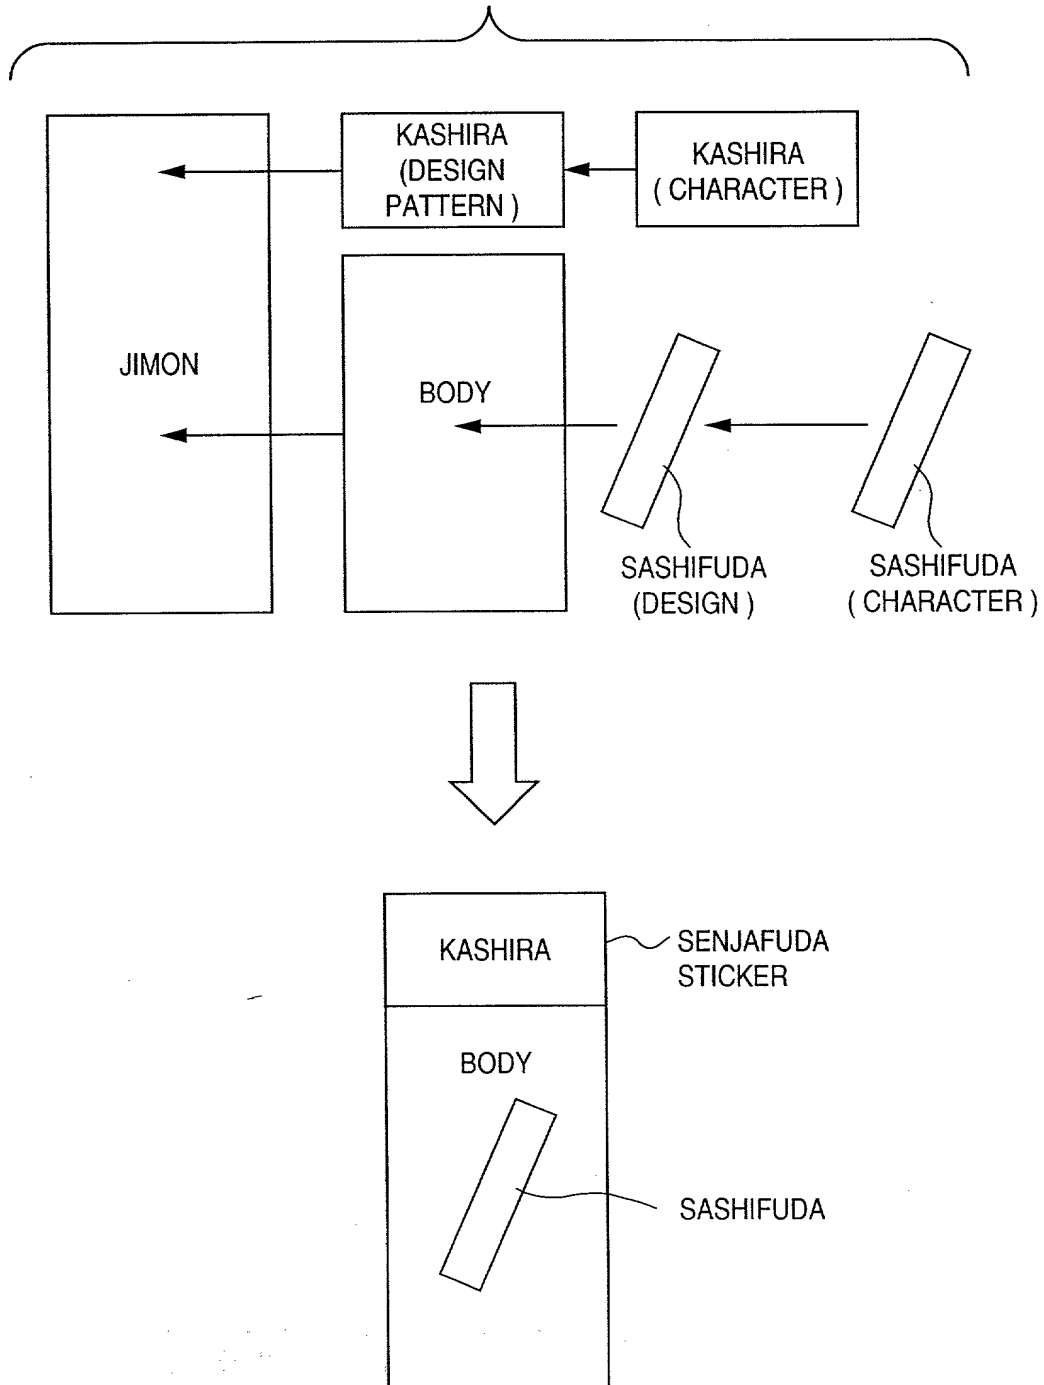


FIG. 13


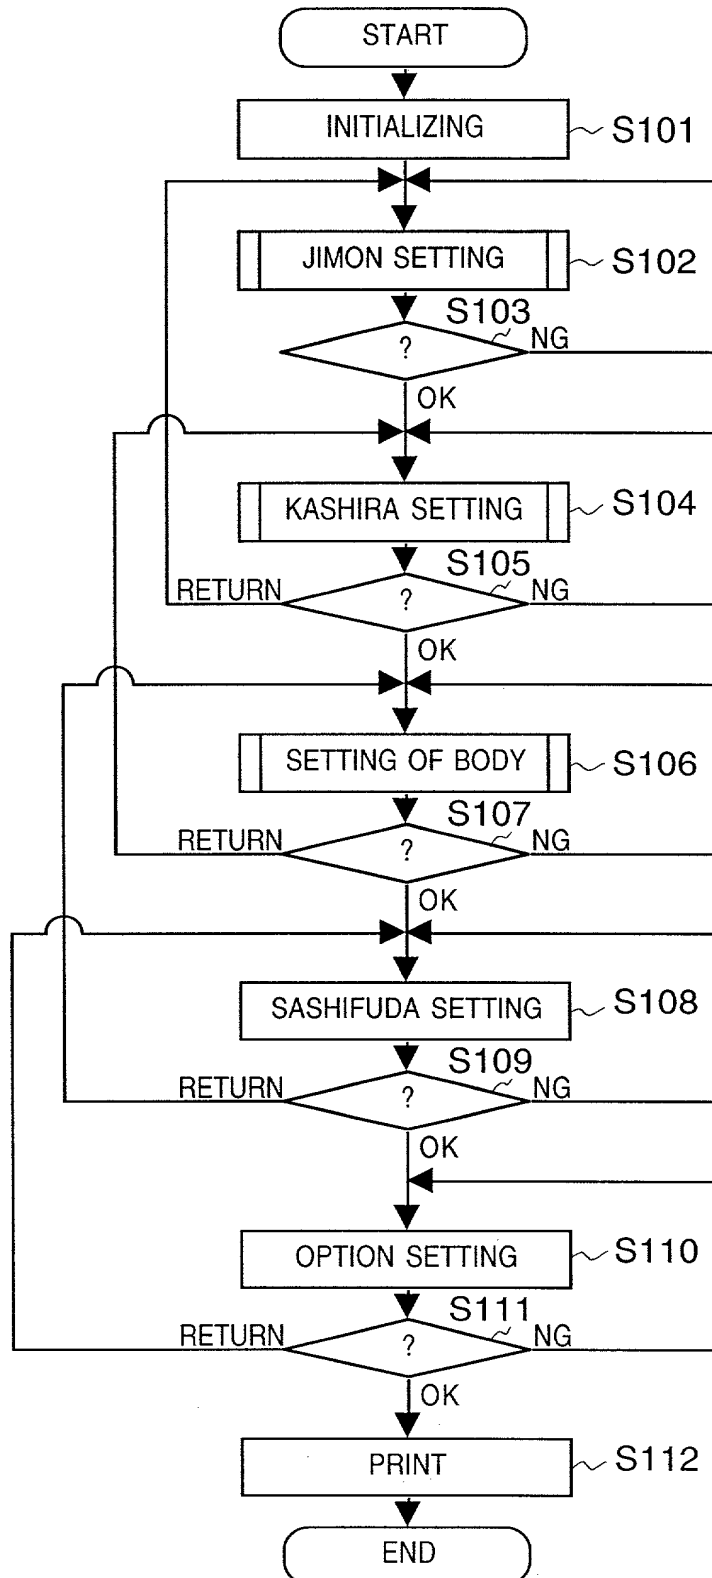


FIG. 14

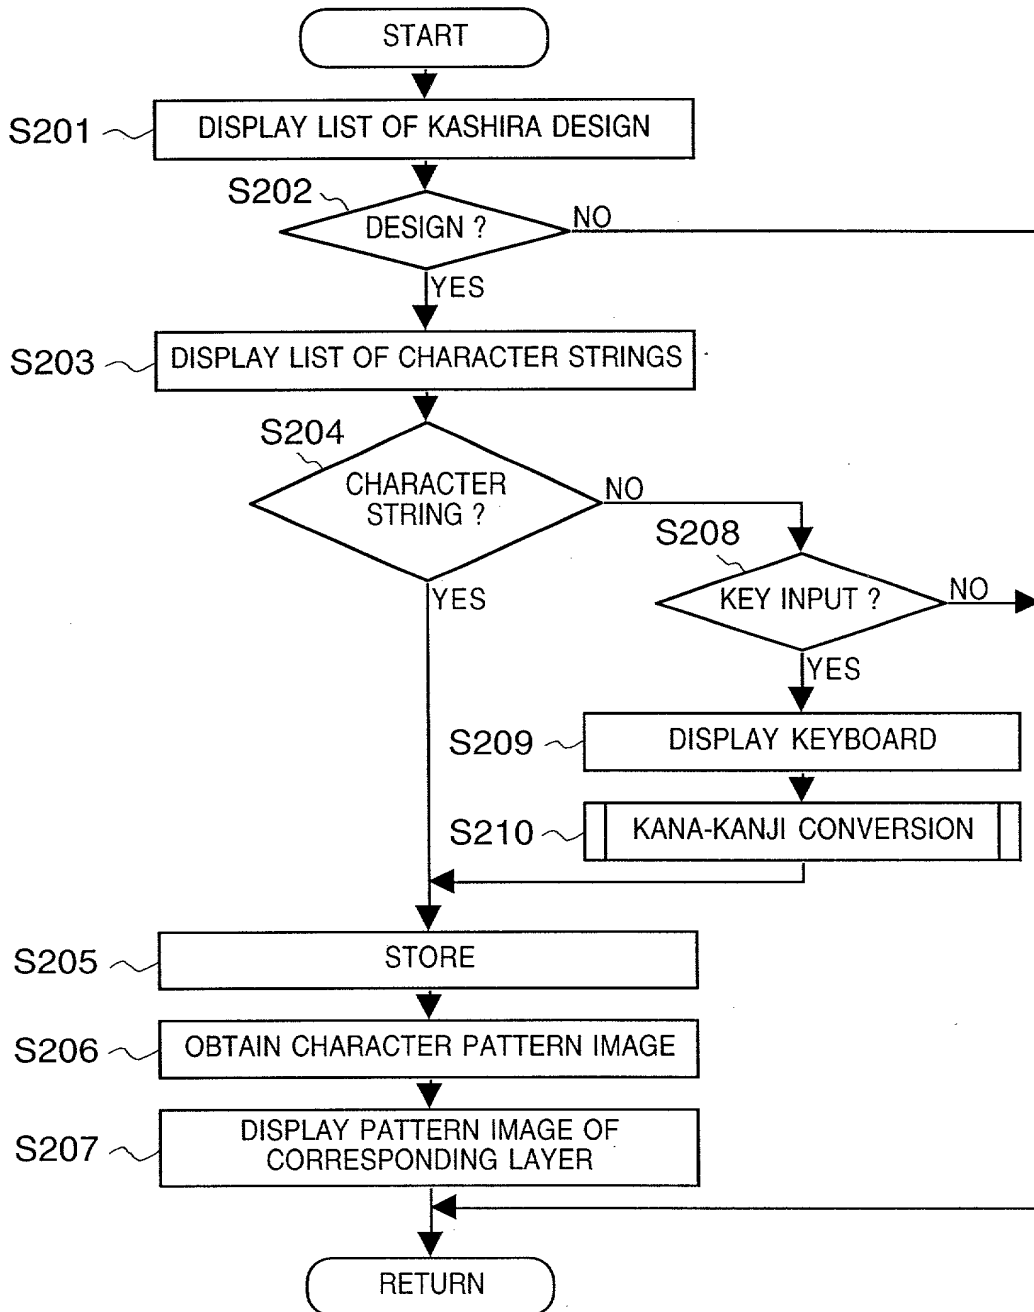

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled ANIMATION DISPLAY APPARATUS, ARCADE GAME MACHINE, CONTROL METHOD AND APPARATUS THEREOF, AND STORAGE MEDIUM, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

<u>Country</u>	<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>(Yes/No) Priority Claimed</u>
JAPAN	11-089716	MARCH 30, 1999	YES
JAPAN	11-089717	MARCH 30, 1999	YES

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>Status (Patented, Pending, Abandoned)</u>
------------------------	----------------------------	--

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor MASAO OKADA

Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 8-8, HANAGURI 1-CHOME, SOKA-SHI, SAITAMA-KEN, JAPAN

Full Name of Second Joint Inventor, if any KATSUHIKO KONDO

Second Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 7-1, WAKAMATSU 2-CHOME, FUNABASHI-SHI, CHIBA-KEN, JAPAN

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 2)

Full Name of Third Joint Inventor, if any ISAO MARUOKA

Third Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 5-5, SAIWAICHO 2-CHOME, MIHAMA-KU, CHIBA-SHI, CHIBA-KEN,
JAPAN

Full Name of Fourth Joint Inventor, if any AKIHIRO YOKOTA

Fourth Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 39-36, IWABUCHIMACHI, KITA-KU, TOKYO, JAPAN